

WD-14W30CC4R-2

TEST ITEM	SPECIFICATIONS
Impedance	$4.0\Omega \pm 20\%$
DCR	$3.2\Omega \pm 7\%$
Sweep test	Must be normal
Big power test	Must be normal
Resonance freq	F0: 53 Hz $\pm 20\%$
Sensitivity	$87 \pm 2\text{dB}$
Curve control	
Rated freq	F0 ~ 10kHz
Distortion	
Normal Power	50W
Maximum Power	100W
Waterproof Leve	
Main Magnet	Ferrite
Auxiliary Magnet	
Flux density	11000 Gauss $\pm 7\%$
Net weight	1.95kg $\pm 10\%$




SPECIFICATIONS


SPL vs Freq



FREQUENCY RESPONSE

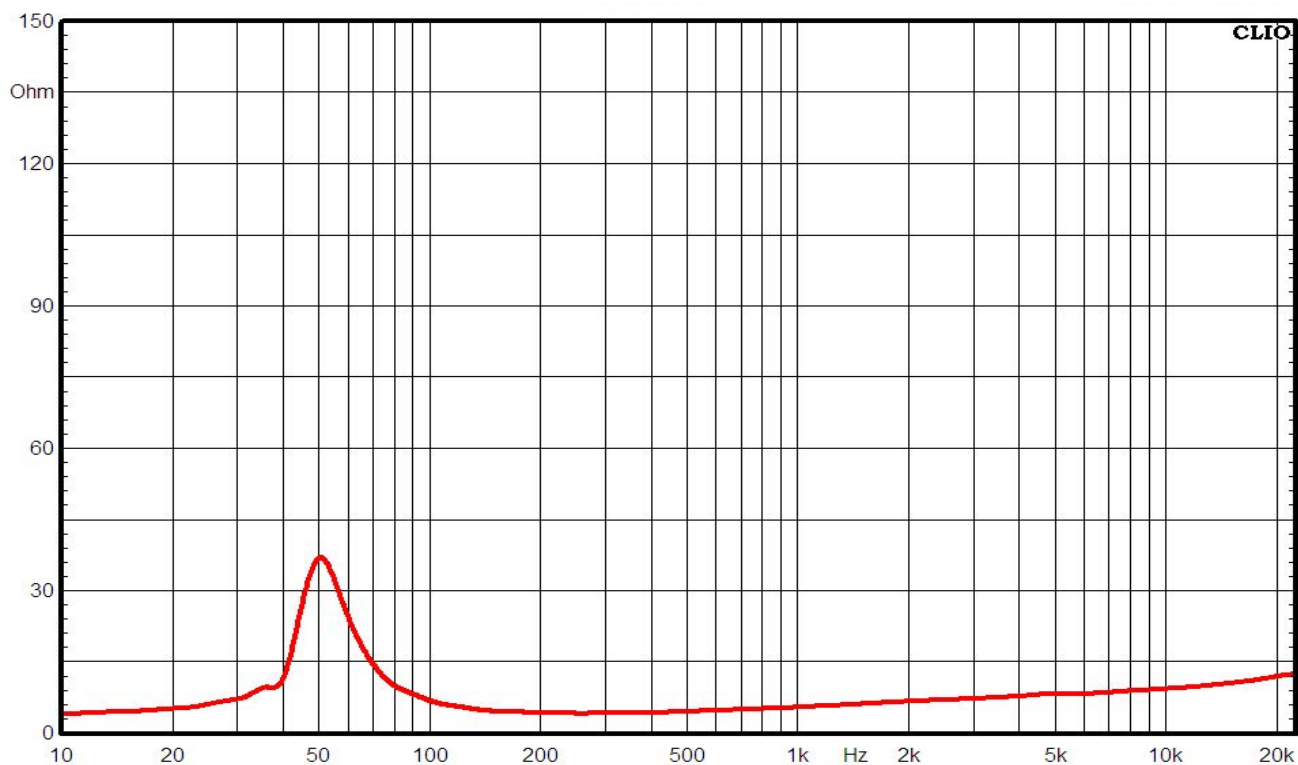

IMPEDANCE CURVE

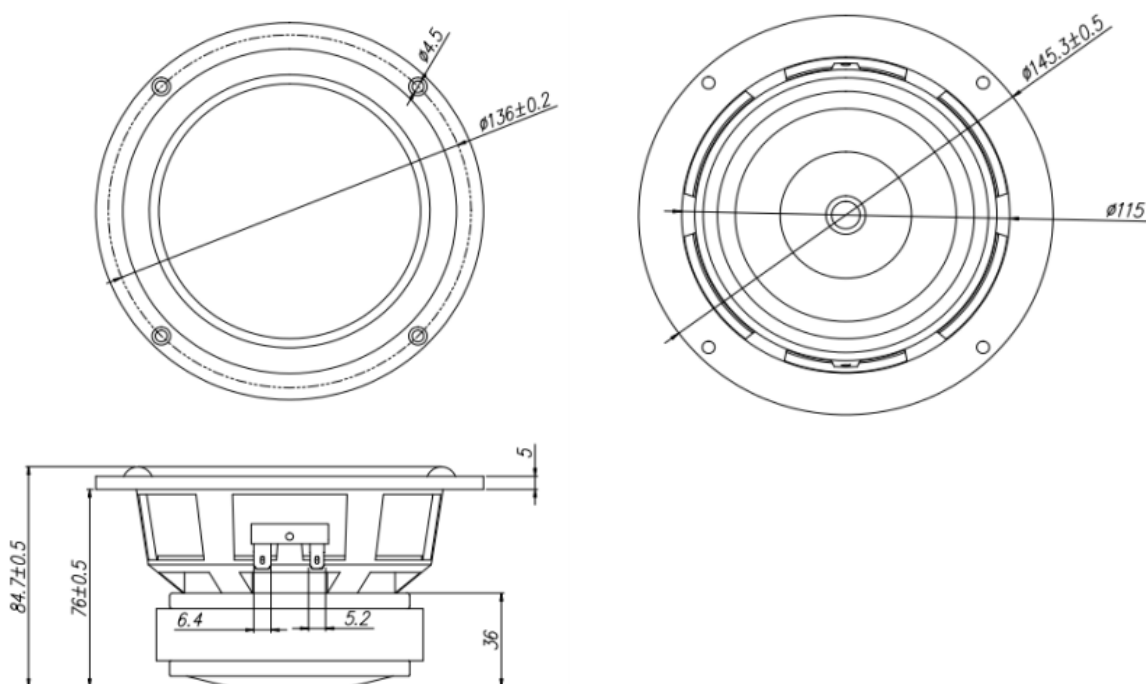

DIMENSIONS mm(in.)