

WD-14W30CC4R-1

TEST ITEM	SPECIFICATIONS
Impedance	4.0Ω ±20%
DCR	3.2Ω ±7%
Sweep test	Must be normal
Big power test	Must be normal
Resonance freq	F0: 53 Hz ±20%
Sensitivity	87±2dB
Curve control	
Rated freq	F0 ~ 10kHz
Distortion	
Normal Power	50W
Maximum Power	100W
Waterproof Leve	
Main Magnet	Ferrite
Auxiliary Magnet	
Flux density	11000 Gauss±7%
Net weight	1.95kg ±10%




SPECIFICATIONS


SPL vs Freq



FREQUENCY RESPONSE

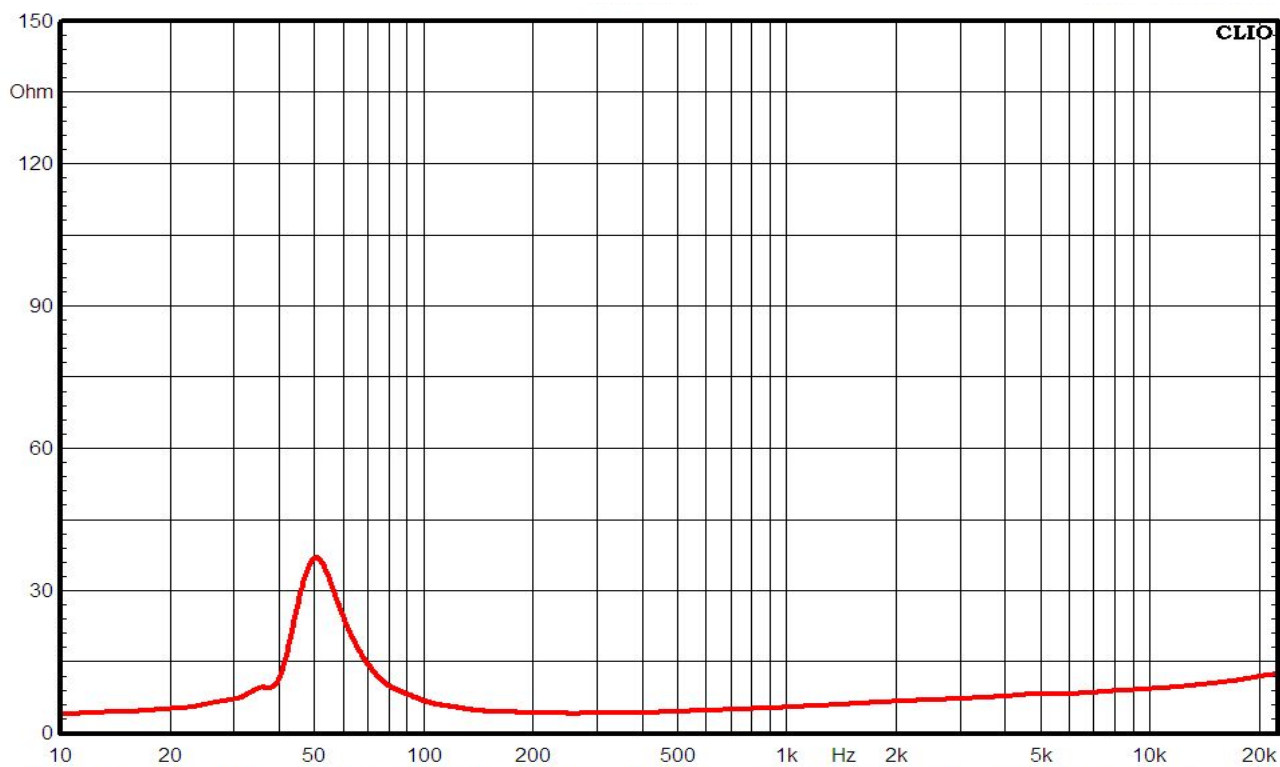

IMPEDANCE CURVE

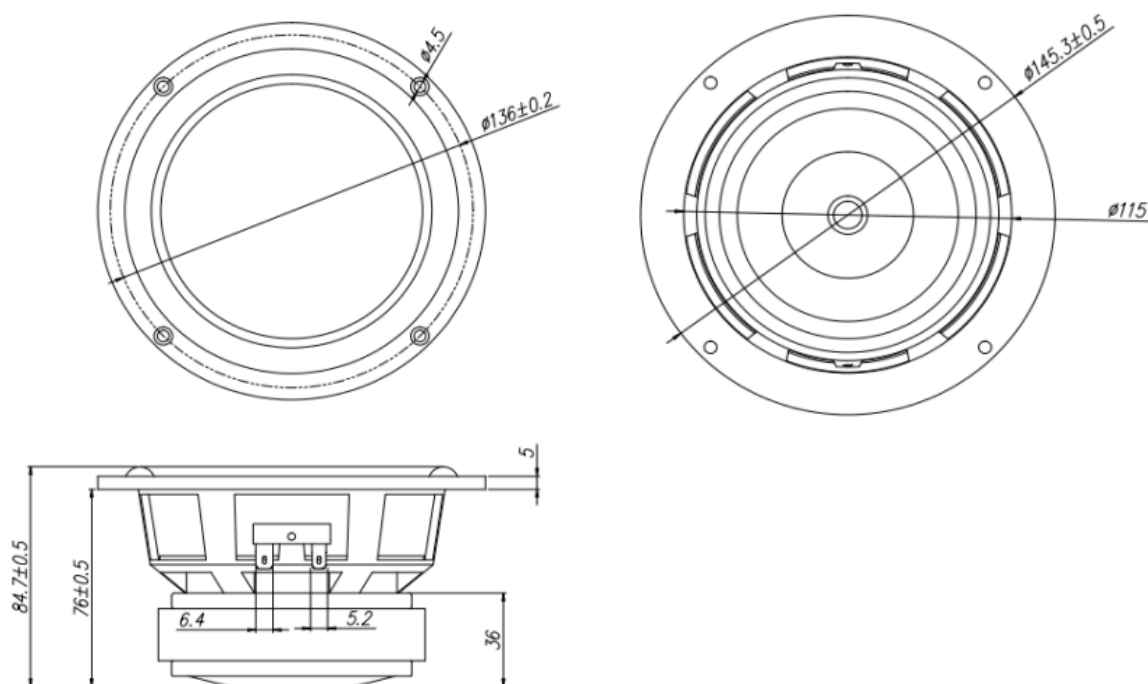

DIMENSIONS mm(in.)