


WD-104H25CC8R-1

TEST ITEM	SPECIFICATIONS
OUTSIDE DIMENSION	Φ104mm
VC .DCR	3.1Ω ±10%
VC. ACR	4Ω ±20%
RESONANT FREQ FO	800Hz ±20%
EFFECTIVE DANDWIDTH	FO -20KHZ
FREQUENCY SWEEP RANGE	500Hz-20KHZ
OUTPUT SPL	86±3dB
RATED INPUT POWER	20W
MAXIMUM INPUT POWER	40W
DISTORTION RATE	10% Max
MAGNET	NdFeB (65X30X7mm)
VC. CSIZE	φ25.4
CONE PAPER	BLACK SILK
FRAME PANEL	ALUMINIUM, BLACK
SPEAKER WEIGHT	0.45kg



SPECIFICATIONS

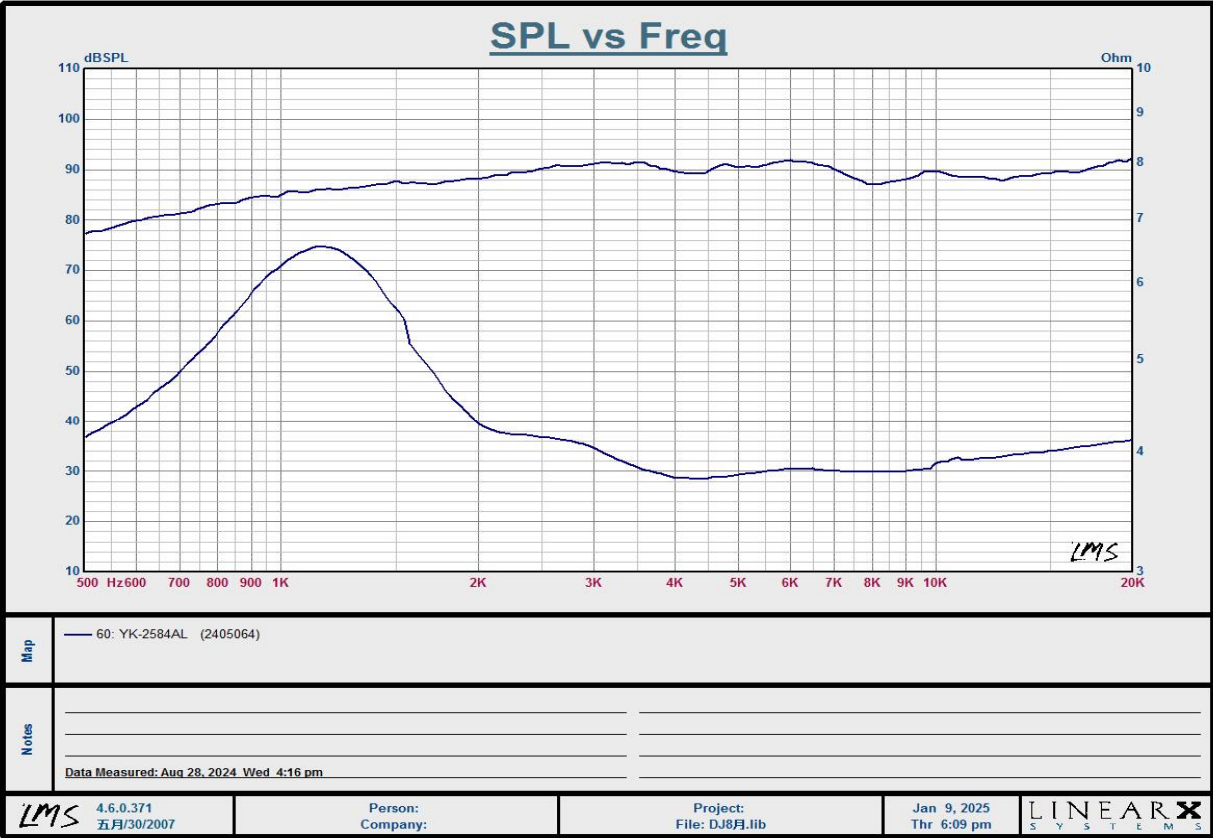

FREQUENCY RESPONSE

